


# FLEX quality accessories for sanding with the Giraffe

The professional tip from FLEX

Patented original FLEX Giraffe perforated sand paper has extremely strong bonding which armatures sanding grit securely to the backing material, making it extremely durable. However, the decisive factors are the perforations and the special grit distribution, these guaranteeing high material removal, a considerably longer service life and optimum dust collection results.


Dust collection with unperforated Velcro sand paper:

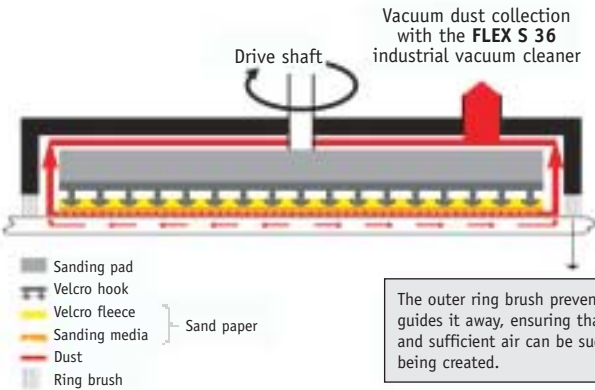

The outer ring brush prevents dust being spun out and guides it away, ensuring that a perfect finish is achieved and sufficient air can be sucked in. This prevents a vacuum being created.



Sanding dust is created between the grinding grits on the sand paper and the surface being sanded during material removal. It can only be removed at the edges of the sanding pad when using unperforated sand paper. The consequences are clogged sand paper, reduced material removal, an uneven finish and copious residual dust on the sanded surface and in the surrounding vicinity.

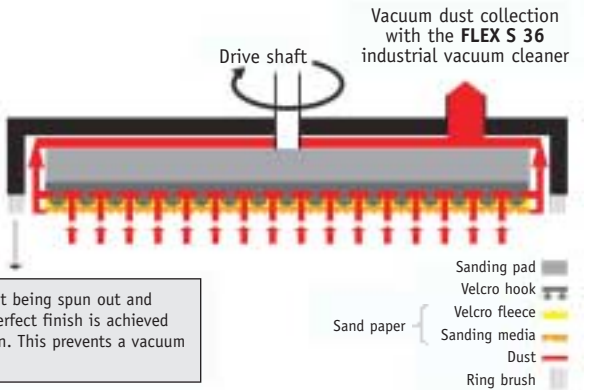
Dust collection with patented FLEX Velcro perforated sand paper:



Sanding dust is not only collected at the edges, but chiefly vacuumed away through the perforations. Clogging is considerably reduced and sanding efficiency quadrupled. The sanded surface is also practically free of dust and can be wallpapered or plastered directly afterwards. Both the air and your lungs are kept freer of dust, and cleaning costs are minimized.




Patented Velcro sanding media for painting and varnishing in dry construction with the WS 702 VEA

	Dimensions in mm	Grit	QTY/ PKG	Order number
<b>Velcro sand paper (perforated)</b>				
	For sanding polystyrene slabs (thermal protection)			
	225 Ø	16	10	279.102
<b>Velcro sanding grid</b>				
	For rapid removal of surface irregularities			
	225 Ø	80	25	260.237
	For rapid removal of fine surface irregularities			
	225 Ø	100	25	260.230



	Dimensions in mm	Grit	QTY/ PKG	Order number
<b>Velcro sand paper (perforated)</b>				
	For leveling coarse surface irregularities			
	225 Ø	40	25	280.739
	For leveling light surface irregularities			
	225 Ø	60	25	260.233
	For removing paint and paste			
	225 Ø	80	25	260.234
	For rapid sanding and smoothing			
	225 Ø	100	25	260.235
	For sanding quick-bonding material			
	225 Ø	220	25	260.236

# FLEX quality accessories for sanding and carrying

**Velcro sanding media for universal applications. For cleaning, sanding and polishing with the WS 702 VEA**

Dimensions in mm	Grit	QTY/ PKG	Order number	Dimensions in mm	Grit	QTY/ PKG	Order number
<b>Velcro SiC (silicon carbide) sand paper sheet</b>				<b>Velcro polishing sponge</b>			
 <ul style="list-style-type: none"> <li>For cleaning metals, non-ferrous metals, glass fiber-reinforced hulls, deck superstructures and wooden decks</li> <li>For pre-sanding aluminum structures and metal surfaces (e.g. steel doors)</li> <li>For priming and sanding fillers and grouting</li> <li>For sanding and polishing light scratches on glass fiber-reinforced hulls and deck superstructures</li> <li>For intermediate sanding and smoothing of glazed deck surfaces</li> <li>Removal of trapped dust on steel doors</li> <li>For sanding and repolishing of trapped dust in covering and clear varnish (only with S 1200)</li> <li>For sanding filling techniques in painting and plastering</li> </ul>				 <ul style="list-style-type: none"> <li>For cleaning glass fiber-reinforced hulls and deck superstructures</li> <li>For sanding and polishing light scratches on glass fiber-reinforced hulls and deck superstructures</li> <li>For sanding and repolishing of trapped dust in covering and clear varnish</li> </ul>			
225 Ø	S 320	10	281.026	225 Ø	soft	5	280.992
225 Ø	S 1200	10	281.018				
<b>Velcro sanding fleece</b>				<b>Sanding and polishing kit</b>			
 <ul style="list-style-type: none"> <li>For rust removal</li> <li>For cleaning metals, non-ferrous metals and wooden decks</li> <li>For pre-sanding aluminum structures</li> <li>For intermediate sanding and smoothing of glazed deck surfaces</li> </ul>				See Velcro SiC sanding belt, Velcro sanding fleece and Velcro polishing sponge for applications			
225 Ø	100	10	281.042	<b>Sanding and polishing kit (13 items)</b>			
225 Ø	180	10	281.034	1			
				286.095			
				consisting of:			
				3 sand paper sheets			
				225 Ø			
				S 320			
				3 sand paper sheets			
				225 Ø			
				S 1200			
				3 sanding fleeces			
				225 Ø			
				grit 100			
				3 sanding fleeces			
				225 Ø			
				grit 180			
				1 polishing sponge			
				225 Ø			
				soft			

## Accessories for the WS 702 VEA

	QTY/ PKG	Order number
<b>Padded adapter for Velcro paper</b>		
 <p>Velcro system for fixing the sanding medium</p>		
	1	260.232
<b>Bail handle</b>		
 <p>For effortless working in difficult positions (e.g. overhead work)</p>		
	1	301.825

## Accessories for the WS 702 VEA

	QTY/ PKG	Order number
<b>Carrying bag for the FLEX Giraffe</b>		
 <p>The clean conveyor for the sander and accessories. Also protects against damage</p>		
	1	280.984