

SUBMERSIBLE

The **LB** series are extremely robust, compact contractor pumps, that have a 50mm (2") outlet and a tough pressed steel strainer base and body. They offer excellent durability during periods of continuous use and/or operator abuse. These models incorporate a dual position outlet port, to enable the user to position the outlet hose horizontally or vertically and avoid it kinking. A choice of either 0.48kW or 0.75kW motors in the range facilitates cost effective pump selection. A combination of a rubber pump chamber and a urethane vortex impeller provides excellent wear resistance in site water applications that contain sand and silt in suspension, thus maintaining performance and reliability. Both models use a 403 stainless steel shaft that is fitted with an ultra hardwearing, silicon carbide, double mechanical seal, (in an oil chamber), with an oil lifter to maintain seal lubrication during operation in any position. This feature, combined with the water and air cooling route to the top outlet, allows the pump to operate for extended periods with little or no water. Considered the "hire industry standard", earlier models have been used in this trade since the mid-70's. Supplied with 10 metres of heavy duty, H07RN-F rubber power cable.

LB

SITE DRAINAGE

- ✓ Hire fleets
- ✓ Utilities
- ✓ Industry
- ✓ Water features
- 50mm (2") outlet
- manual
- automatic
- 110 volts
- 230 volts



LB-480 manual




LB-480 automatic



LB-800 manual

ACCESSORIES

- Hoses page 85
- Lever lock couplings page 90
- Hose clips page 97

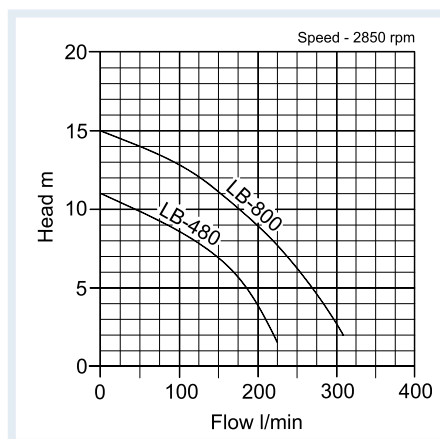

PRICE CODE

B

model	Manual or Auto	outlet (mm)	kW	volt avail.	flow (l/min)	head (mtrs)	free passage (mm)	dia x h (mm)	weight (kgs)	price (£)
LB-480	M	50	0.48	110•230	225	11	6	Ø187x275	10.4	231.00
LB-480	A	50	0.48	110•230	225	11	6	Ø187x275	10.8	256.00
LB-800	M	50	0.75	110•230	310	15	6	Ø187x341	13.2	449.00
LB-800	A	50	0.75	110•230	310	15	6	Ø187x341	13.6	474.00